




MQS-72 STEREO MINI MIXER VI

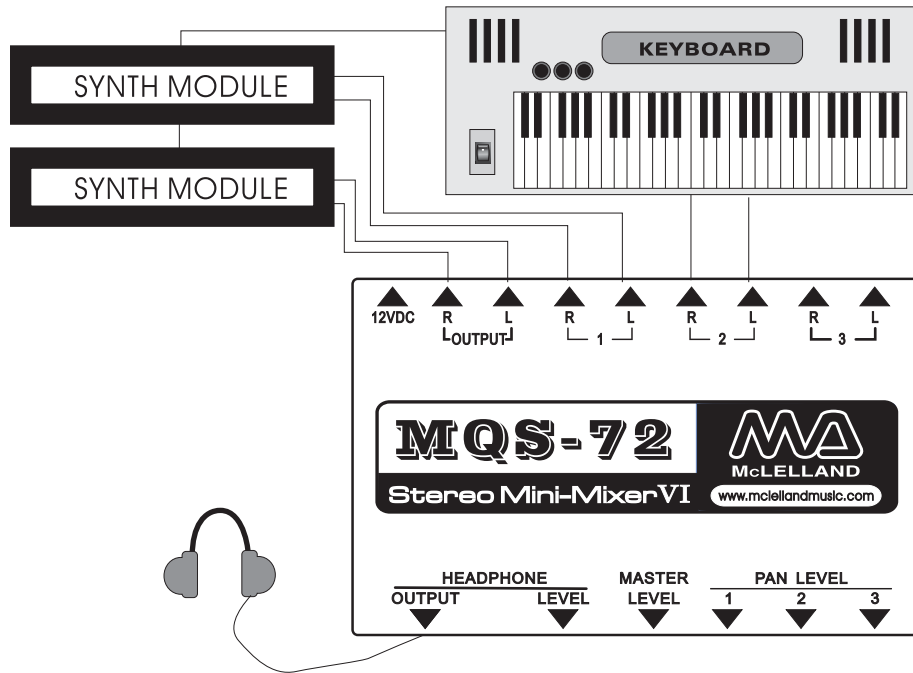

Thank you for your purchase of the MQS-72 MiniMix VI. The MQS-72 is a three channel true stereo mixer designed for keyboard or other stereo line level signal mixing.

DESCRIPTION

FRONT PANEL

LEVEL 1 - 3: Volume Controls: Adjusts the amount of input signal to the indicated channel.

MASTER LEVEL: Master volume control, adjusts the amount of overall signal sent to the main Right and left outputs.

HEADPHONE LEVEL: Adjusts the amount of signal sent to the Headphone Output.

PAN 1-3: varies the relative amount of right and left signal from the channel to the mix bus.

PHONE OUTS: Two 1/4" TRS Stereo jacks for connection to stereo headphones.

REAR PANEL

CH1-CH3 inputs: 1/4" unbalanced inputs

The Right input is the MONO input.

Right and Left MAIN OUTPUTS: 2: 1/4" unbalanced outputs containing the three mixed stereo signals.

DC IN: Power jack accepts +12 to +16 volts DC (Outside of the barrel is positive)

OPERATION

Shown below is an example setup for the MQS-72. The power adapter is not shown. It should be connected to the proper voltage, grounded AC outlet.

SPECIFICATION

Input Impedance:	10k Ω	THD.+Noise:	<0.005%
Output Impedance:	100k Ω	Power:	12 VDC/150mA adapter
Max. Gain:	+27dBV	Max. Input Level:	+30dBV
Max. Output Level:	+13dB	Dimension:	143mm X93mm X45mm
Frequency Response:	20Hz~20KHz+1dBV	Weight:	590 g