




# MQS-35 PHONO PREAMP

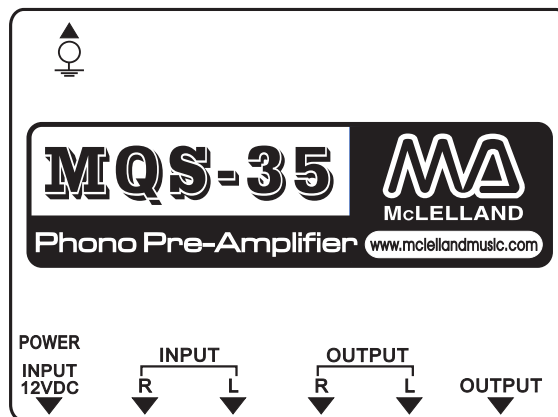

Thank you for your choice of the MQS-35 Phono Preamp. The MQS-35 is designed to amplify an RIAA equalized phono signal to a Hi-Fi level signal, and it works well with magnetic pickups.

## DESCRIPTION

**PWR INPUT** 12-16 Volts DC, tip negative jack.

**GROUND CONNECTOR** Connects to the Ground of the phono player

**INPUT** Stereo RCA jacks for connection to the phono player

**OUTPUT** Stereo RCA jacks for connection to a stereo system or amplifier.

**OUTPUT** 1/4" Tip-Ring-Sleeve jack for connection to a stereo amplifier.

## SPECIFICATIONS

I/O Connectors: RCA, 1/4" TRS Stereo

Power: 12 VDC

Size: 95mm x 73mm x 40mm

Weight: 289 g

Indicator: 1 Power LED

## OPERATION

Shown below is an example of how to connect your MQS-35.

